

Safety Instructions

iTEMP TMT84, TMT85, OTMT84, OTMT85

ATEX: II1G Ex ia IIC T6...T4 Ga

IECEX: Ex ia IIC T6...T4 Ga



iTEMP TMT84, TMT85, OTMT84, OTMT85

Table of contents

Associated documentation	4
Supplementary documentation	4
.....	4
Manufacturer's certificates	4
Safety instructions	5
Safety instructions: Installation	5
Safety instructions: Zone 1 and Zone 2	6
Safety instructions: Zone 0	6
Safety instructions: Specific requirements	7
Temperature tables	7
Connection data	7

Associated documentation

This document is an integral part of the following Operating Instructions:

Associated documentation for TMT84

- Operating instructions: BA00257R/09/EN
- Technical information: TI00138R/09/EN

Associated documentation for TMT85

- Operating instructions: BA00251R/09/EN
- Technical information: TI00134R/09/EN

Supplementary documentation

Explosion-protection brochure: CP00021Z/11

The Explosion-protection brochure is available: In the download area of the Endress+Hauser website: www.endress.com → Download → Advanced → Documentation code: CP00021Z



This document has been translated into several languages. Legally determined is solely the English source text.

Manufacturer's certificates**IEC Declaration of Conformity**

Certificate number: IECEx PTB 08.0001 X

Affixing the certificate number certifies conformity with the following standards (depending on the device version).

IECEx

- IEC 60079-0 : 2017
- IEC 60079-11 : 2011

ATEX Declaration of Conformity


Certificate number: PTB 07ATEX2056 X

Affixing the certificate number certifies conformity with the following standards (depending on the device version).

ATEX

- EN IEC 60079-0 : 2018
- EN 60079-11 : 2012

Safety instructions

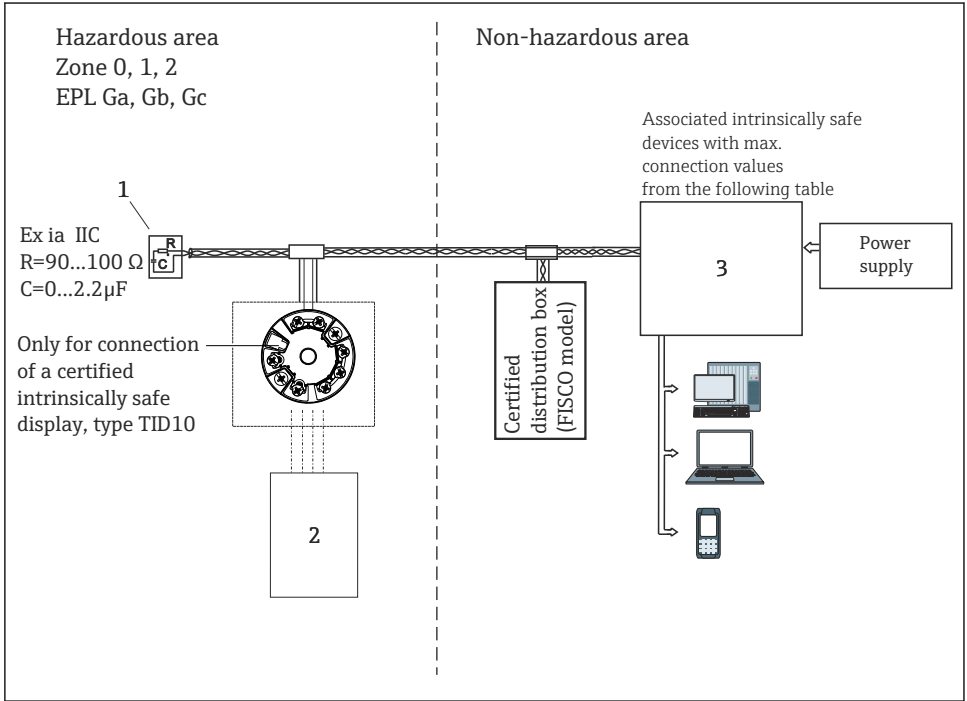

A0025059-EN

- 1 Termination resistance (FISCO model)
- 2 E.g. RTD or TC sensor (simple apparatus) mounted directly or remotely. Optionally two-channel
- 3 Certified additional operating material (FISCO model) with max. connection values from the following table

Safety instructions: Installation

Safety instructions: Installation

- Install the device according to the manufacturer's instructions and any other valid standards and regulations (e.g. EN/IEC 60079-14).
- When installing the unit note that the housing ingress protection classification IP20 according to EN/IEC 60529 is upheld.
- When connecting the measurement unit with a certified circuit of category "ib" into an IIC or IIB hazardous area the ignition class changes to: Ex ib IIC or Ex ib IIB.
- The device (terminal head) must be connected to the potential compensation cable.
- The certified TID10 display may only be installed in zone 1/EPL Gb or zone 2/EPL Gc.

- The permissible ambient temperatures for the display, type TID10, are to be observed.
- When using a capacitive isolation of the ground system the maximum capacity must not exceed 10 nF and must also be done in the non-hazardous area (e.g. 1 nF capacitors, insulation voltage 1 500 V, ceramic).
- Disconnect the transmitter from the power supply, terminals (1+) and (2-), before accessing the device via the CDI (Endress+Hauser Common Data Interface) using the Commubox type FXA291.

**Safety
instructions: Zone
1 and Zone 2**

- According to the specifications of the manufacturer, this apparatus can be operated in zone 1 (category 2)/EPL Gb or zone 2 (category 3) /EPL Gc.
- The sensor current circuit may be introduced into zone 0 (category 1)/EPL Ga.

**Safety
instructions: Zone
0**

(These instructions are only valid if the unit is to be installed directly in the zone 0 (category 1)/EPL Ga.)

- Explosive moisture/air mixtures are only allowed to occur under atmospheric conditions.
 - $-20\text{ °C} \leq T_a \leq +60\text{ °C}$
 - $0.8\text{ bar} \leq p \leq 1.1\text{ bar}$

If there is no explosive mixture present or the additional measures according to EN 1127-1 are upheld the unit can also be operated outside the atmospheric conditions according to the manufacturers specification.

- The restricted ambient temperatures as per EN 1127-1 6.4.2 must be observed (see table).
- The power circuit to be supplied must meet the specifications for explosion protection Ex ia IIC (EN/IEC 60079-14 12.3).
- The devices can only be used in fluids if the process-wetted materials are sufficiently resistant to such fluids.
- If the entire device is operated in Zone 0/EPL Ga, the compatibility of the device materials with the fluids has to be ensured. (Housing: polycarbonate (PC), potting: polyurethane (silicone)).
- It is not permitted to mount the TID10 display in zone 0/EPL Ga.
- The temperature transmitter must be installed in such a way that electrostatic charge cannot occur, e.g. installation in grounded metallic head or grounded housing.

**Safety instructions:
Specific requirements**

- Only the display type TID10, which has undergone an EU-Type Examination in accordance with PTB 08 ATEX 2007, may be optionally connected to the display interface of the iTEMP TMT8x and OTMT8x temperature head transmitter.
- Please ensure that no electrostatic charge can occur during installation of the iTEMP TMT84, TMT85 or OTMT84 and OTMT85 temperature head transmitter.

Temperature tables

Type	Temperature class	Ambient temperature zone 1	Ambient temperature zone 0
TMT84, OTMT84 TMT85, OTMT85	T6	$-40\text{ °C} \leq T_a \leq +55\text{ °C}$	$-20\text{ °C} \leq T_a \leq +40\text{ °C}$
	T5	$-40\text{ °C} \leq T_a \leq +70\text{ °C}$	$-20\text{ °C} \leq T_a \leq +50\text{ °C}$
	T4	$-40\text{ °C} \leq T_a \leq +85\text{ °C}$	$-20\text{ °C} \leq T_a \leq +60\text{ °C}$

Connection data

Type	Electrical data		
TMT84, OTMT84 TMT85, OTMT85	Power supply (terminals + and -)	$U_i \leq 17.5\text{ V}_{DC}$ or $I_i \leq 380\text{ mA}$ $C_i = 5\text{ nF}$ $L_i = 2.75\text{ }\mu\text{H}$ $P_i \leq 1\text{ 400 mW}$	24 V_{DC} 250 mA $C_i = 5\text{ nF}$ $L_i = 2.75\text{ }\mu\text{H}$
	Applicable for connection to a Fieldbus system according to FISCO/FNICO-model		
	Sensor circuit (terminals 3 to 6)	$U_o \leq 7.2\text{ V}_{DC}$ $I_o \leq 25.9\text{ mA}$ $P_o \leq 46.7\text{ mW}$ $C_i = 5\text{ nF}$ $L_i = \text{negligibly small}$	
	Max. connection values	$L_o = 20\text{ mH}$ $L_o = 50\text{ mH}$ $L_o = 100\text{ mH}$	$C_o = 0.97\text{ }\mu\text{F}$ $C_o = 4.6\text{ }\mu\text{F}$ $C_o = 6.0\text{ }\mu\text{F}$

Category	Type of protection (ATEX)	Type
II1G	Ex ia IIC T6...T4 Ga	TMT84, OTMT84 TMT85, OTMT85

Type of protection (IEC)	Type
Ex ia IIC T6...T4 Ga	TMT84, OTMT84 TMT85, OTMT85



71513163

www.addresses.endress.com
